




INFLATABLE OIL BOOM



The OSPICO Inflatable Boom is designed for harbor, bay, and any protected water locations. Its operation is very practical and suitable for emergency and semi-permanent deployment either from storage area or from the OSPICO Inflatable Boom Reel. Its draft and freeboard length will ensure that no oil passes through the Inflatable Boom. The OSPICO Inflatable Boom is classified into 4 types: OSIB 70, OSIB 100, OSIB 150, and OSIB 200.

TECHNICAL DATA

Type	OSIB70	OSIB 100	OSIB 150	OSIB 200
Overall Height (cm)	70	100	150	200
Free Board (cm)	23,1	33	49,5	66
Draft (cm)	33,7	48,2	72,2	96,3
Material	Reinforced Polyester			
Color	Red			
Section Length (m)	10, 20, 40			
Operation Area	Protected Water	Open Sea		
Inflation System	Air Inflated Chamber with One Way Monsoon Valve			
Boom Connector	Stainless Steel 316			
Ballast	Galvanized Chain			
Air Inflator	Two Stroke Petrol Engine or Single Cylinder Air Cooled Diesel			

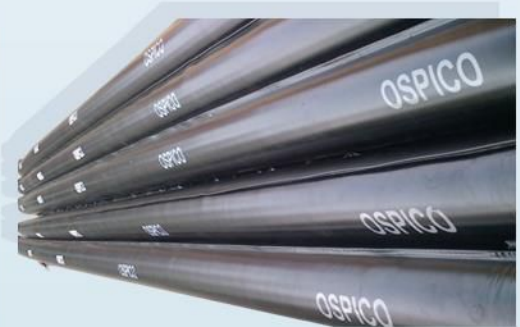

PT . BLUE OCEAN SEJAHTERA

Nifarro Park, ITS Tower Unit 1208, Jl. Raya Pasar Minggu Kav. 18 Jakarta 12510

Phone +62 21 22792650, +62 21 22792651

Email : marketing@blueoceansejahtera.com

