




# OSSKIM OWS 100-T

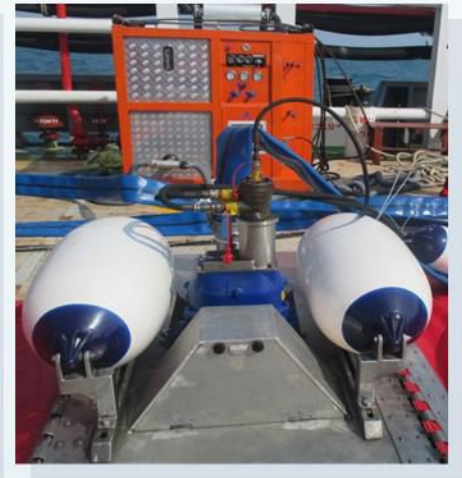

## TECHNICAL DATA

Dimension		Material	
Length	78.7 inch	Body Frame	Aluminum Alloy
Width	51.1 inch	Fitting	Stainless Steel 316
Height	27.9 inch	Floating	Rubber
Weight ( Max )	450 kg	Connector Boom	Stainless Steel 316
Float	43.3 inch	Ballast	Chain Galvanized
Operating draft	9.84 inch	Connection	Quick Release Coupling
Standard Accessories		Hose Kit	
1 x Lifting	3 x Hose	Suction Hose	30 m ( 50 feet ) Ø 5 inch Flexible hose with camlock
Tool Kit Cover	1 set	Hydraulic Hose	2 x 30m x Ø 1/2 inch with Quick Release Coupling
	1 set		1 x 30m x Ø 1/4 inch with Quick Release Coupling
Transfer pump			
Type	Self priming		
Capacity	100 ton / hours		
Driven	Hydraulic motor		
Power Pack		Power Pack Dimension	
Starting Operation	Electric Start	Length	1600 mm
Power	56 kw	Height	1600 mm
Frame Finish	Epoxy Paint	Width	1200 mm
		Weight	890 kgs



OSSKIM OWS 100-T is a special section of the skimmer that connected with a weir and a pump. It is available in 5 size ranged from 100 to 2000. The weir is placed for collecting the oil that face the OSKIMM OWS 100-T. One or two units of OWS 100-T can be joined together in one boom assembly, offering a high recovery rate. The OWS 100-T is ideal for open sea operations.

**PT . BLUE OCEAN SEJAHTERA**

Niffaro Park, ITS Tower Unit 1208, Jl. Raya Pasar Minggu Kav. 18 Jakarta 12510

Phone +62 21 22792650, +62 21 22792651

Email : [marketing@blueoceansejahtera.com](mailto:marketing@blueoceansejahtera.com)

